

Strip combination light source, 35 series

LS-LM35 series · Bar lights · 8 models



Combination of four strip lights; the light angle can be freely adjusted and each bar is independently controlled. Good universality, can be freely combined; preferred for large-format lighting.

Features

- Light source angle can be freely adjusted, each bar independently controlled
- Good versatility, can be freely combined, suitable for many occasions; first choice for large-format lighting
- Size can be customized according to different needs

Applications

- PCB substrate inspection
- Electronic component inspection
- Mark point positioning
- Defect detection, character detection and positioning recognition of large-format products
- Clear outline of the object with obvious contrast

Colours

R	Red
G	Green
B	Blue
W	White
IR	Infrared
UV	Ultraviolet

Common specifications

Voltage	24 V DC (12 V on request)
Height (mm)	46
Bar emitting width (mm)	35
Mounting	4 x M4 through

Cable length (mm)	500
Construction	Four-bar combination

Ordering code: LS-LM<length><length>-35-<colour> (e.g. LS-LM125125-35-R; R/G/B/W/IR/UV)

Models


Model	Number of lamp rows	Overall frame size (mm)	Inner opening (mm)	Power red (W)	Power white/blue/green (W)
LS-LM125125-35 colours: R, G, B, W, IR, UV	8	231	126	6.91	8.64
LS-LM180180-35 colours: R, G, B, W, IR, UV	8	296	176	9.68	12.1
LS-LM200250-35 colours: R, G, B, W, IR, UV	8	254	252	10.37	12.96
LS-LM250250-35 colours: R, G, B, W, IR, UV	8	370	252	10.37	12.96
LS-LM350200-35 colours: R, G, B, W, IR, UV	3	457	351	55.30	69.12
LS-LM350250-35 colours: R, G, B, W, IR, UV	8	442	353	56.6	70.8
LS-LM450200-35 colours: R, G, B, W, IR, UV	3	596	321	51.60	64.51
LS-LM500200-35 colours: R, G, B, W, IR, UV	3	528	321	55.30	69.12

More values per model (Overall height (mm)) are on each product page.

Dimensions



02

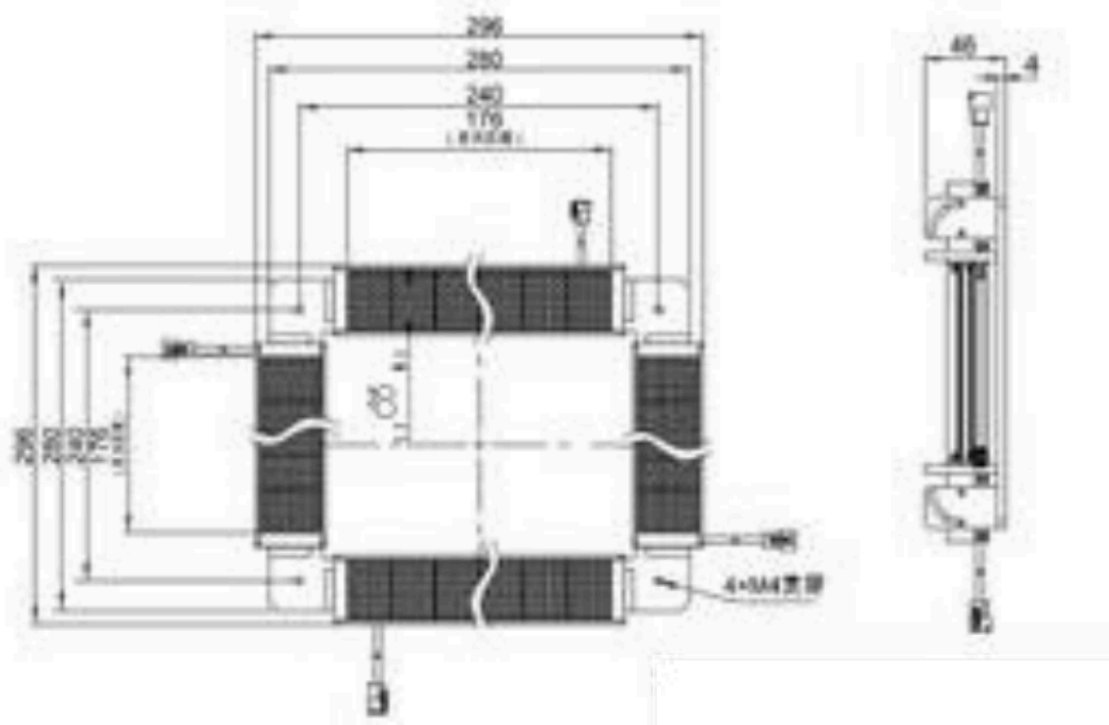

LS-LM180180-35

Product views

