

Light extension cables

LS-LX series · Cables · 9 models


Extension cables for lights: standard and high-flex SMP cables, strobe light cables, 10 W spot light cable, line light cables, multi-zone light cable and time-division strobe line-scan light cable; X in the model is the length in metres.

Ordering code: <cable type>-L<X>, X = length in metres (1, 3, 5; line-light and time-division cables also 10)

Models


Model	Cable type	Length X (m)	Connector (from drawing)	Remarks
LS-SM24-LX	Standard extension cable	1, 3, 5 m	SMP connector cable: female plug housing to male plug housing; 30 mm heat-shrink sleeve at each end (shaded), 3.5 / 5 mm	-
LS-LZ-SM24-LX	Standard high-flex extension cable	1, 3, 5 m	SMP connector cable: female plug housing to male plug housing; 30 mm heat-shrink sleeve at each end (shaded), 3.5 / 5 mm	-
LS-AC10P3-LX	Strobe (burst) light extension cable	1, 3, 5 m	3-pin circular aviation connectors	-
LS-LZ-AC10P3-LX	Strobe (burst) high-flex light extension cable	1, 3, 5 m	3-pin circular aviation connectors	-
LS-AC10P4-LX	10W spot light extension cable	1, 3, 5 m	4-pin circular aviation connectors	-
LS-AC16P6-LX	Line light extension cable	1, 3, 5, 10 m	6-pin circular aviation connectors	For lights used with the LS-CPL48320C-2T controller
LS-AC24P6-LX	Line light extension cable	1, 3, 5, 10 m	6-pin circular aviation connectors	For lights used with the LS-CPL48760C-2T controller
LS-AC16P9-LX	Standard multi-zone light extension cable	1, 3, 5 m	9-pin circular aviation connectors	-
LS-AC24P5-LX	Time-division strobe line-scan light extension cable	1, 3, 5, 10 m	5-pin circular aviation connector to threaded connector	-

Dimensions

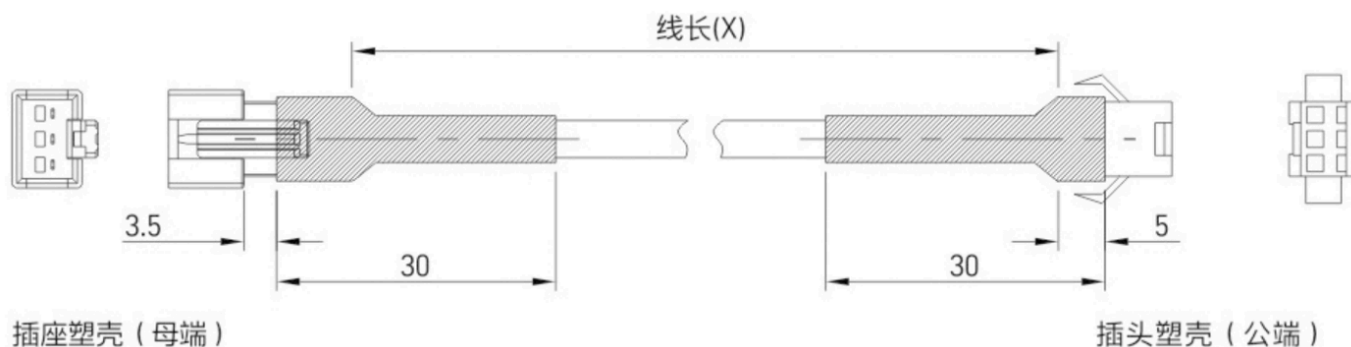

备注：阴影部分为热缩管

X代表长度，可选1、3、5米

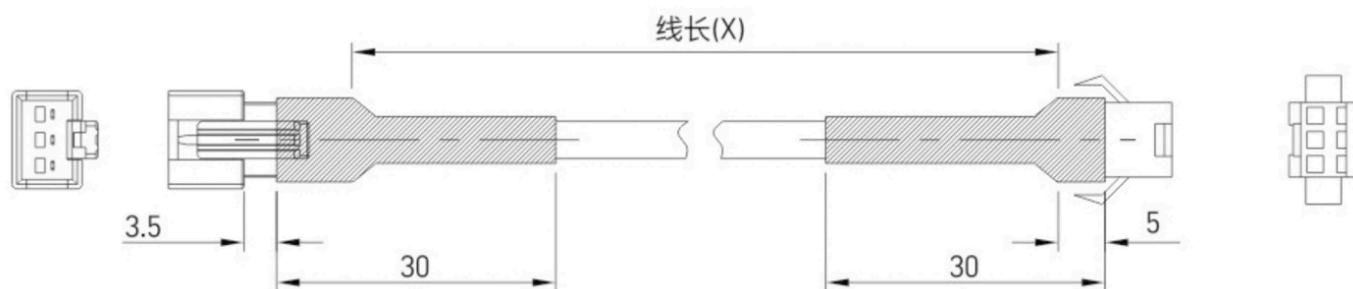


插座塑壳 (母端)


插头塑壳 (公端)

备注: 阴影部分为热缩管.

X代表长度, 可选1、3、5米

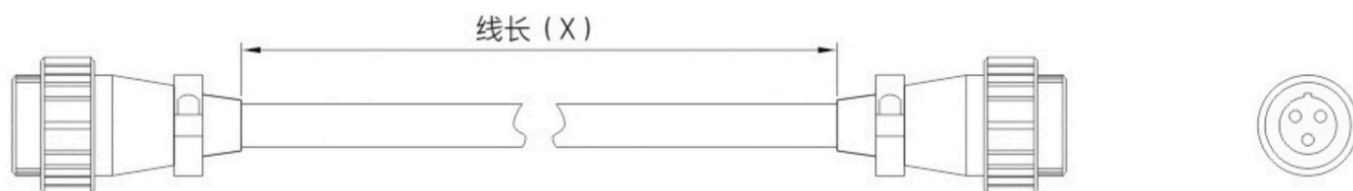

X代表长度, 可选1、3、5米

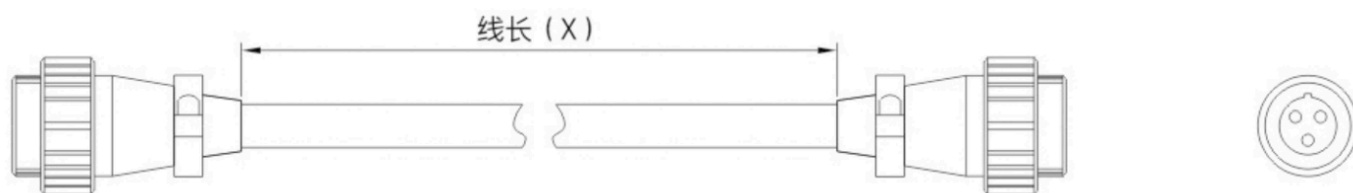

X代表长度, 可选1、3、5米