

ABS external power digital controller

LS-MD01C-EXT series · Light controllers · 2 models

Controller section 'ABS external power digital controller' of the light controller selection manual (cards P11-P12).

Features

- Supports RS232 communication
- External power supply up to 24V
- Low trigger response time
- Supports external trigger mode
- Supports millisecond strobe and microsecond strobe
- Brightness and mode can be set manually
- 5~24V trigger, adaptable to high and low level trigger modes
- Small size, easy to install, screw mounting or C45 rail mounting




Ordering code: LS-M D 01 C-24 XXX-<channels>: M mould (ABS) shell, D digital PWM, 01 series, C RS232, 24 max output voltage, XXX max current per channel

Models

Model	Connected light source type
LS-MD01C-24010-4	10mA~1A 24V power supply
LS-MD01C-24030-4	10mA~3A 24V power supply

More values per model (Output voltage, Number of channels, Built-in power supply, Max input voltage, Max output voltage, Max current per channel, Overheat protection, Short circuit protection, Working mode, Brightness levels, Millisecond strobe time, Microsecond strobe time...) are on each product page.

Dimensions

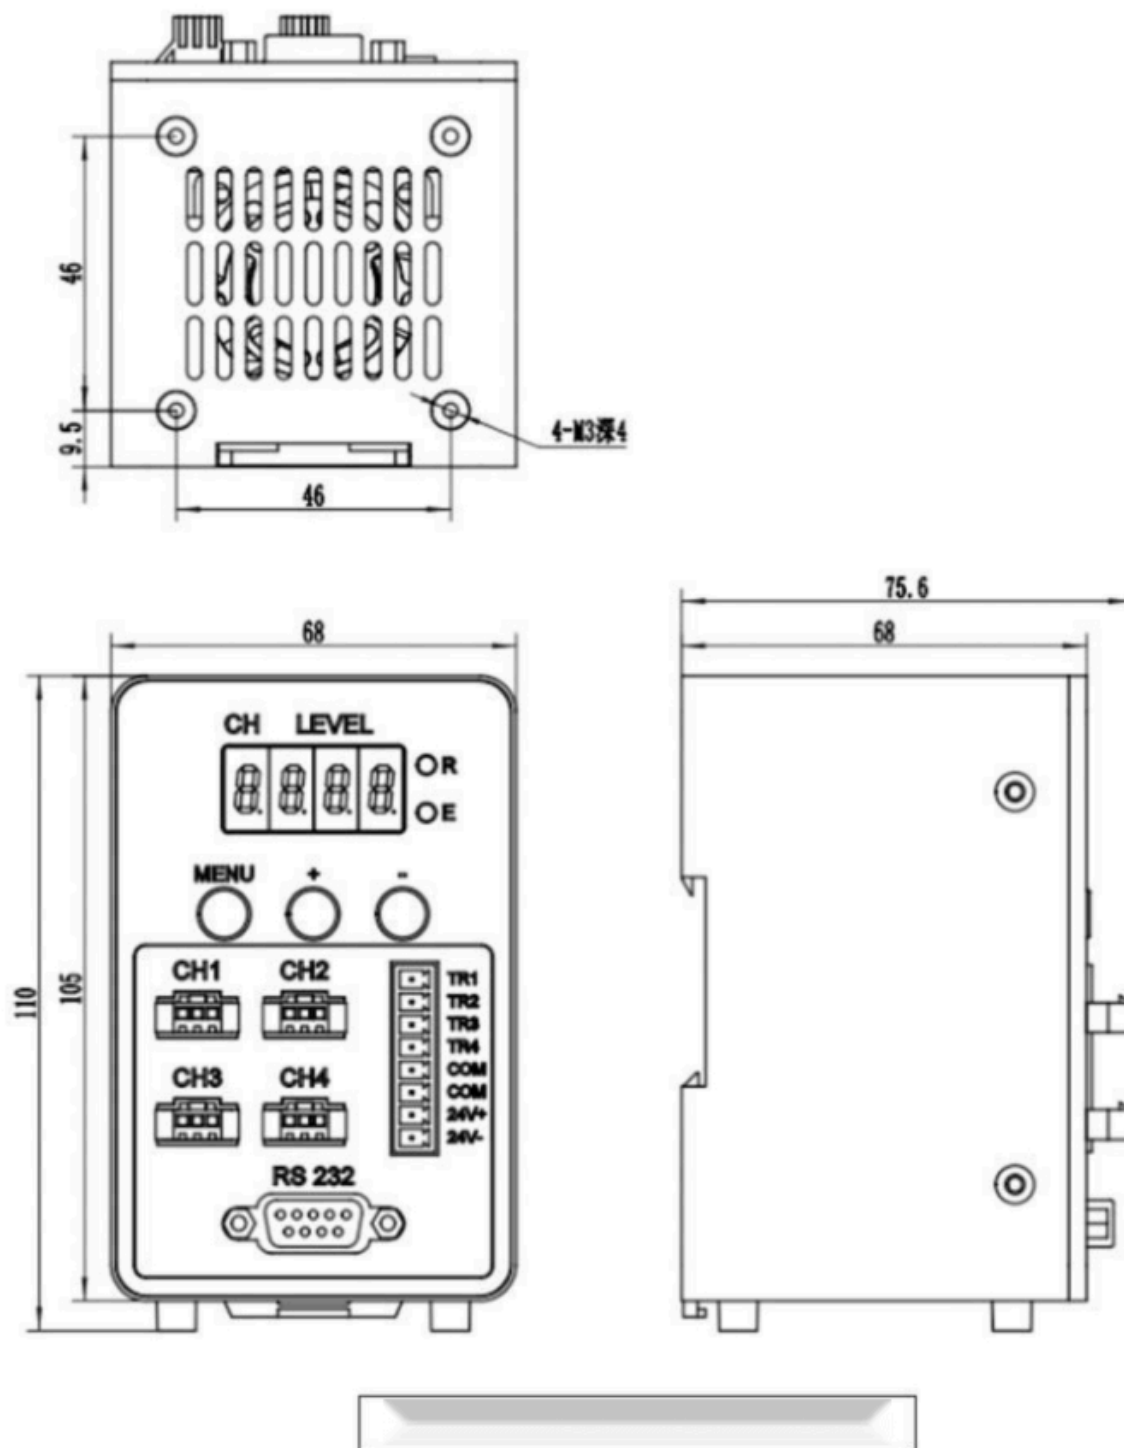

Product views

