

ABS point light controller

LS-MP01C series · Light controllers · 1 model

Support RS232 communication. Single channel adjustable output current, maximum current 1A. Support external trigger mode.

Features

- Support RS232 communication
- Single channel adjustable output current, maximum current 1A
- Support external trigger mode
- Support millisecond strobe and microsecond strobe
- Brightness and mode can be set manually
- 5~24V trigger, adaptable to high and low level trigger modes
- Small size, easy to install, screw mounting or C45 rail mounting



Common specifications

Maximum output current of single channel	1A
Maximum input voltage	AC220V
Maximum output voltage	5V
Overheat protection	no
Working mode	0: Internal trigger; 1: Always on; 2: Millisecond level flicker; 3: Microsecond level flicker
Short circuit protection	no
Brightness level	255 levels
Millisecond strobe time	1~999ms
Microsecond strobe time	1~999us
Communication baud rate	9600~115200bps optional
Trigger mode	Edge + level trigger
Operating temperature	5~50°C
Luminous mode	Normal light, normal extinction, strobe
Driving mode	constant current
Dimension	90×94.6×150mm


Models

Model	Built-in power supply power	Number of channels	Connected light source type	Catalog page	Output voltage	Built-in power supply	Max current per channel
-------	-----------------------------	--------------------	-----------------------------	--------------	----------------	-----------------------	-------------------------

LS-65-MP01C-05010-4	65W	4	10mA~1A 5V power supply	P25	5V	65W	1A
---------------------	-----	---	-------------------------	-----	----	-----	----

More values per model (Communication, Trigger, Mounting, Manual page code, Total output (W), Control) are on each product page.

Dimensions

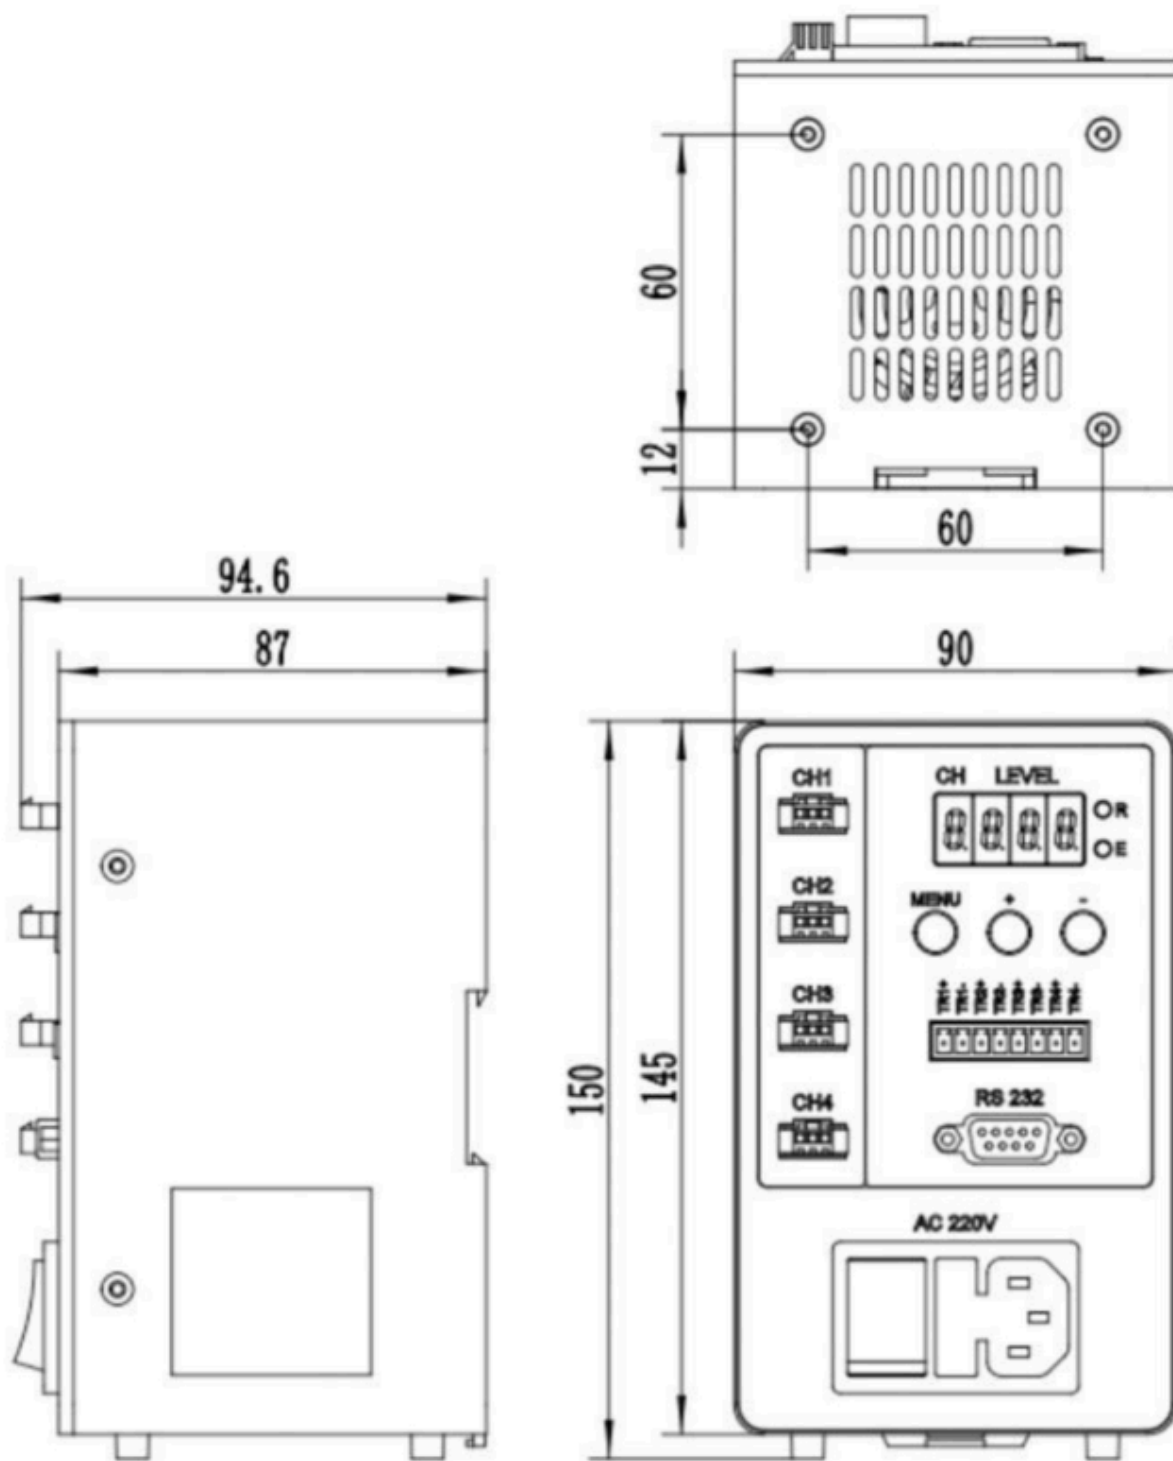

Product views

