

LED ring light (NTR)

LS-NTR series · Ring lights · 4 models

LED ring lights, 150 mm OD / 95 mm ID and 95 mm OD / 55 mm ID, 0° angle, in white, blue, red and green; -A and -P versions.

Features

- Quick and efficient customization
- Uniform, low heat illumination
- Widely used in microscope
- Long working distance
- Compact design
- High density and high brightness LED array

Applications

- Measurement inspection of mechanical components
- Inspection of transparent film
- Microscope illumination



Colours

B	465 nm
G	525 nm
R	635 nm
W	5300 K


Ordering code: Printed example LS-R95W: NT (brand) + B (ring light, as printed) - R (version) 95 (outer dia. 95 mm) W (colour W: white); the model list uses LS-C<OD><colour>-A/P

Models

Model	Size	Current (<A)	Power (<W)	Size (mm)
LS-C150X-A colours: W, B, R, G	150mm (OD) 95mm (ID)	1	18.8	150 x 94 x 24.5
LS-C150X-P colours: W, B, R, G	150mm (OD) 95mm (ID)	1	18.8	150 x 94 x 24.5
LS-C95X-A colours: W, B, R, G	95mm (OD) 55mm (ID)	0.7 (White, Blue, Green); 0.5 (Red)	11.3 (White, Blue, Green); 10 (Red)	98 x 54 x 24.5
LS-C95X-P colours: W, B, R, G	95mm (OD) 55mm (ID)	0.7 (White, Blue, Green); 0.5 (Red)	11.3 (White, Blue, Green); 10 (Red)	98 x 54 x 24.5

More values per model (Colour, Angle) are on each product page.

Performance

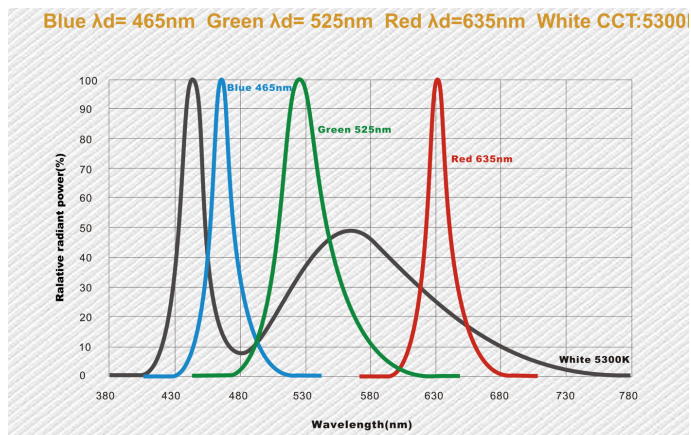

Product views

