

Arc-shaped back light (SFT)

LS-SFT series · Backlights · 7 models

Semi-curved shape design, used with high uniformity diffuser, to make the uniformity higher. Arc-shaped and dimensions can be customized.



Features

- Semi-curved shape design, used with high uniformity diffuser, to make the uniformity higher
- Arc-shaped and dimensions can be customized

Applications

- Semi-curved shaped bottle appearance inspection
- Metal edge location inspection
- Wafer particles inspection
- Scratch of mobile camera lens inspection

Common specifications


Note	UV & IR light can be customized as required.
Voltage	24V

Models


Model	Model as printed	Dimension	Power
LS-SFT18072-90 colours: R, G, B, W	LS-SFT18072-90-R/GBW	Out dia. 180,Inner dia. 140,Height 80mm	8.7W/10.8W
LS-SFT29075-100 colours: R, G, B, W	LS-SFT29075-100-R/GBW	Out dia. 290,Inner dia. 250,Height 83mm	20.2W/26.0W
LS-SFT84042-28 colours: R, G, B, W	LS-SFT84042-28-R/GBW	Out dia. 840,Inner dia. 796,Height 50mm	15.4W/19.2W

LS-SFT140142-180 colours: R, G, B, W	LS-SFT140142-180-R/GBW	Out dia. 140,Inner dia. 100,Height 72mm	24.0W/30.3W
LS-SFT180112-120 colours: R, G, B, W	LS-SFT180112-120-R/GBW	Out dia. 180,Inner dia. 140,Height 120mm	17.3W/21.6W
LS-SFT400150-105 colours: R, G, B, W	LS-SFT400150-105-R/GBW	Out dia. 400,Inner dia. 360,Height 162mm	46.1W/57.6W
LS-SFT300100-55-W-PL	-	Out dia. 300,Inner dia. 260,Height 112mm	14W

Dimensions


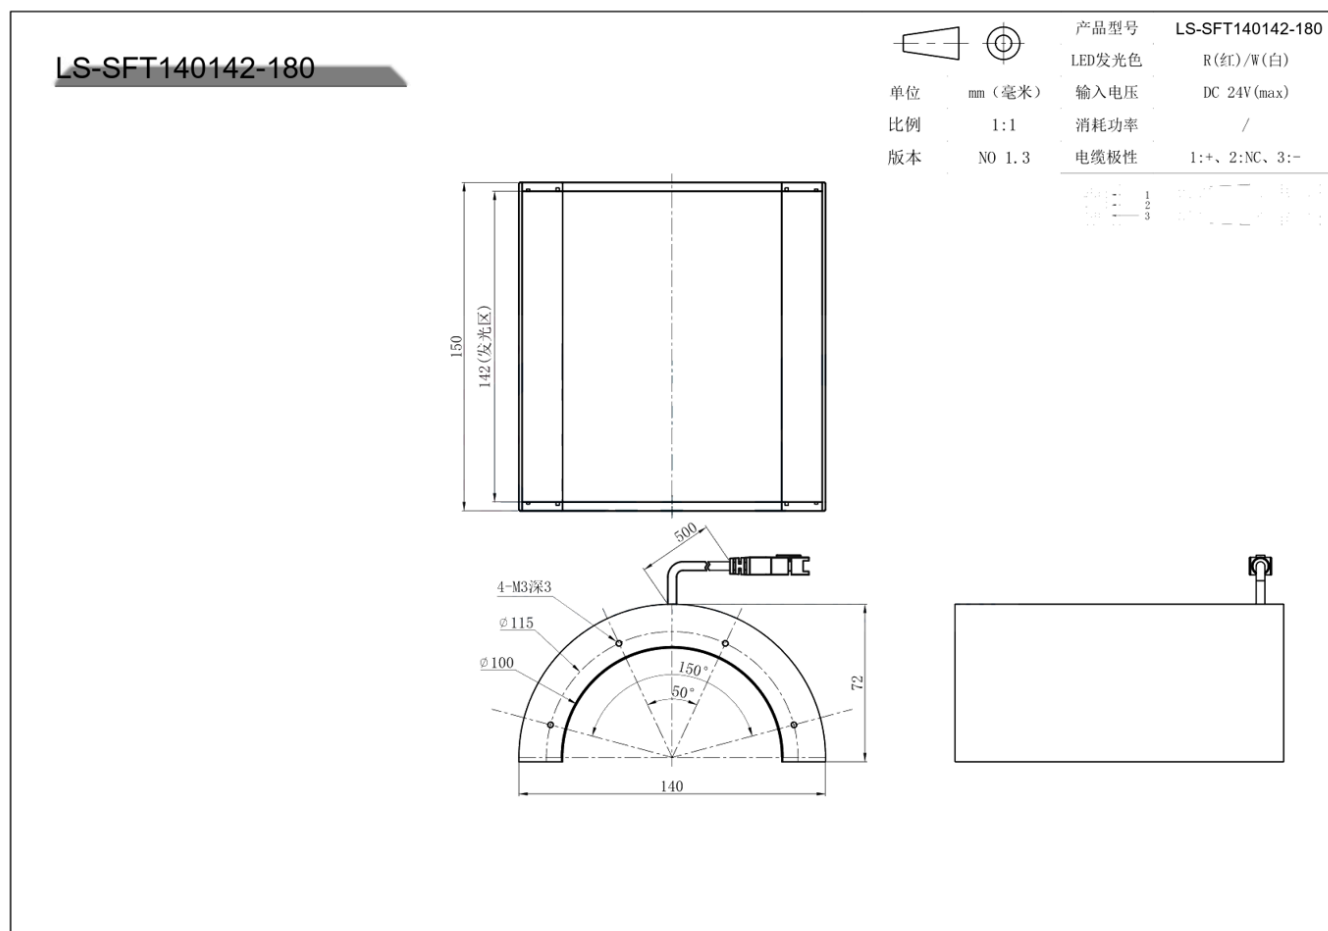


LS-SFT140142-180




单位 mm (毫米)
比例 1:1
版本 NO 1.3

产品型号 **LS-SFT140142-180**
LED发光色 R(红)/W(白)
输入电压 DC 24V(max)
消耗功率 /
电缆极性 1:+、2:NC、3:-

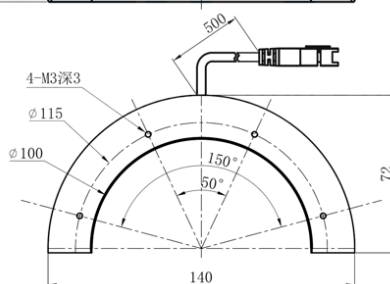
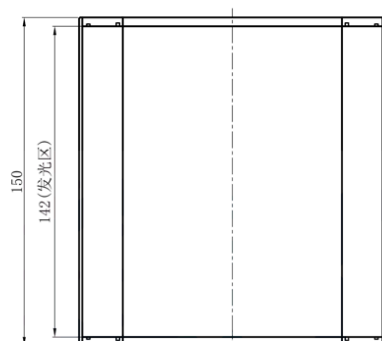


LS-SFT18072-90

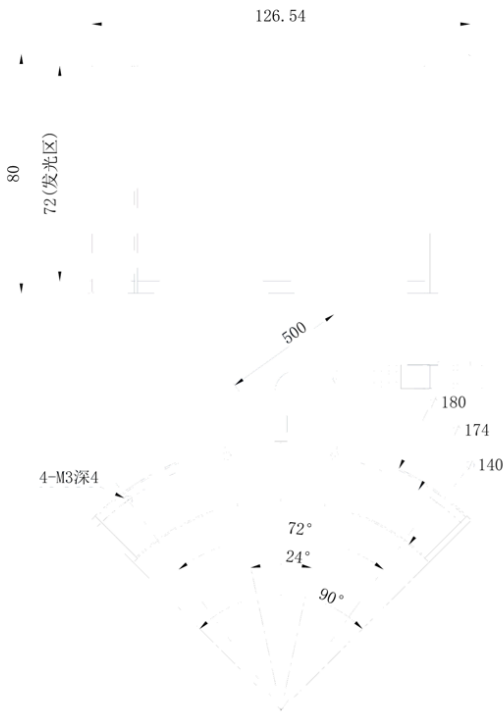

	产品型号	LS-SFT18072-90
	LED发光色	R(红)/W(白)
	输入电压	DC 24V(max)
	消耗功率	/
单位	mm(毫米)	
比例	1:1	
版本	NO 1.1	
		电缆极性 1:+, 2:NC, 3:-
		

LS-SFT29075-100

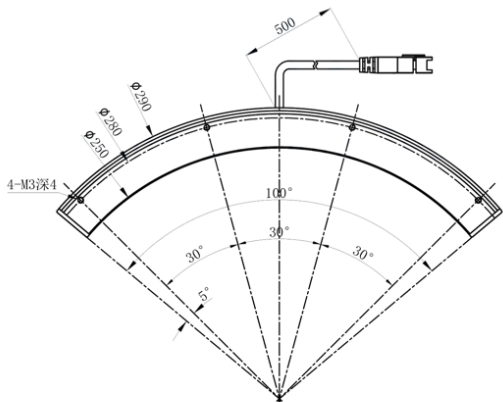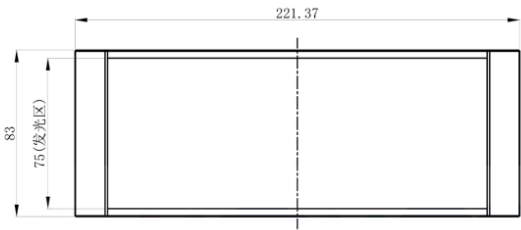

单位 mm (毫米)
比例 1:1
版本 NO 1.0

产品型号	LS-29075-100
LED发光色	R (红) / W (白)
输入电压	DC 24V (max)
消耗功率	/
电缆极性	1: +, 2: NC, 3: -

