


# Square ring light (SQR)

LS-SQR series · Ring lights · 3 models

Use high luminance LEDs, low angle emitting. Suitable for IC chip characters or PCB characters inspection.

## Features

- Use high luminance LEDs, low angle emitting
- Suitable for IC chip characters or PCB characters inspection

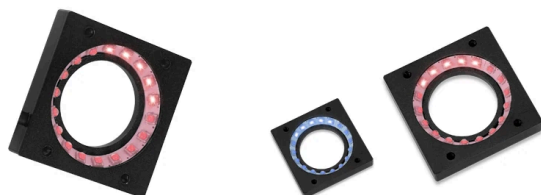

## Applications

- Character recognition
- Inspection of appearance
- Damage and dirt inspection
- 2D code reading

## Common specifications

|         |                                              |
|---------|----------------------------------------------|
| Note    | UV & IR light can be customized as required. |
| Voltage | 24V                                          |

## Models

| Model                             | Model as printed | Dimension        | Power     |
|-----------------------------------|------------------|------------------|-----------|
| LS-SQR2840<br>colours: R, G, B, W | LS-SQR2840-R/GBW | L28xW28xH4(mm)   | 1.1W/1.1W |
| LS-SQR3085<br>colours: R, G, B, W | LS-SQR3085-R/GBW | L30xW20xH12(mm)  | 0.6W/0.6W |
| LS-SQR3440<br>colours: R, G, B, W | LS-SQR3440-R/GBW | L34xW34xH6.5(mm) | 2.2W/2.2W |

## Dimensions

# LS-SQR3085



产品型号 LS-SQR3085

LED发光色 R(红)/W(白)


输入电压 DC 24V(max)

消耗功率 /

单位 mm(毫米)

比例 1:1

版本 NO 1.0

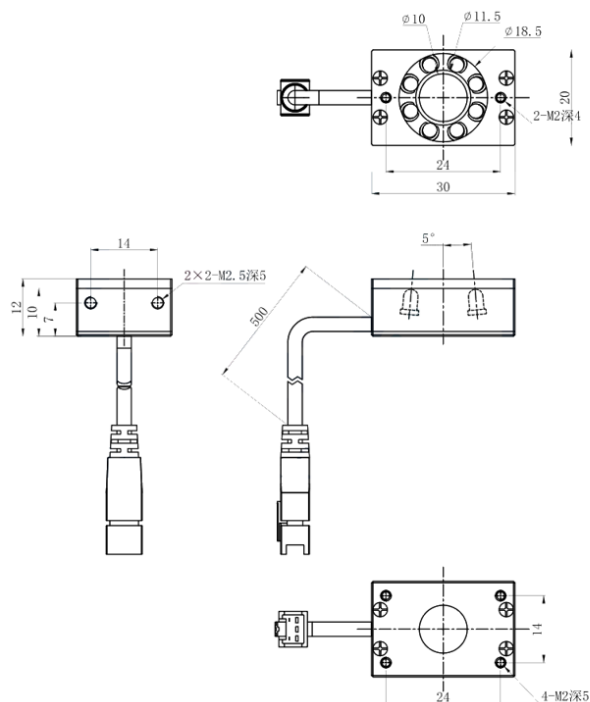

# LS-SQR3085



产品型号

LS-SQR3085

LED发光色

R(红)/W(白)

输入电压

DC 24V(max)

消耗功率

/

单位


mm(毫米)

比例


1:1

版本

N0 1.0

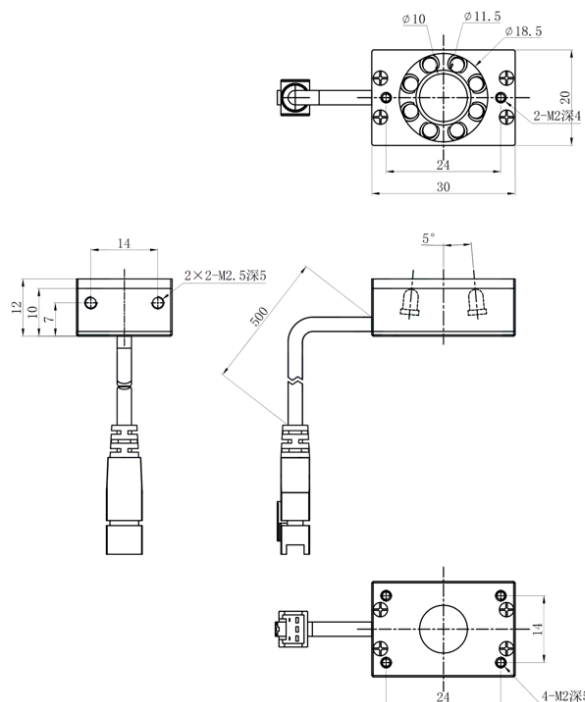

LS-SQR2840

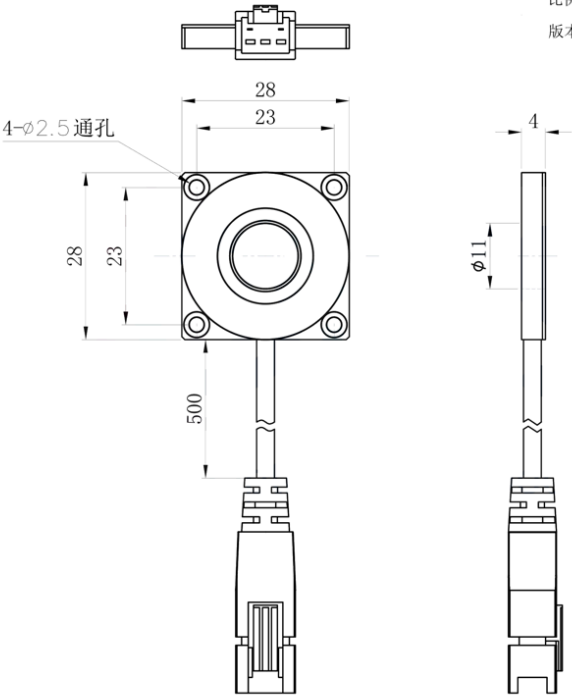


|    |         |
|----|---------|
| 单位 | mm (毫米) |
| 比例 | 1:1     |
| 版本 | NO 1.0  |

|        |                   |
|--------|-------------------|
| 产品型号   | LS-SQR2840        |
| LED发光色 | R (红) / W (白)     |
| 输入电压   | DC 24V (max)      |
| 消耗功率   | /                 |
| 电缆极性   | 1: +, 2: NC, 3: - |



## LS-SQR3440

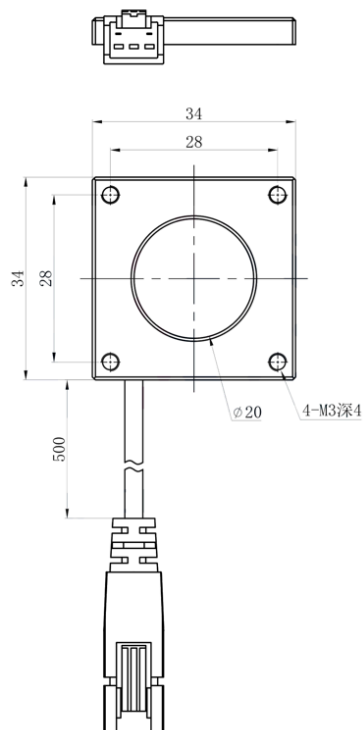

单位 mm (毫米)  
比例 1:1  
版本 NO 1.0

产品型号 **LS-SQR3440**  
LED发光色 R(红)/W(白)  
输入电压 DC 24V(max)  
消耗功率 /  
电缆极性 1:+, 2:NC, 3:-

